



TECHNICAL SPECIFICATIONS	SE 600 SP ECO 900 SP	SE 600 PS/SP	SE 600 PC/SP	ECO 600 PC/SP
Maximum Speed	525 ft. / min.	525 ft. / min.	525 ft. / min.	525 ft. / min.
Maximum Product Size	5" W x 14" L	5" W x 9" L	5" W x 9" L	5" W x 9" L
Minimum Product Size	1" W x 2" L	1.25" W x 2" L	1.25" W x 2" L	1.25" W x 2" L
Maximum Thickness	.625"	.625"	.625"	.625"
Minimum Thickness	.004"	.004"	.004"	.004"
Capacity	20"	20"	20"	20"
Voltage	110 VAC / 220 VAC	110 VAC / 220 VAC	110 VAC / 220 VAC	110 VAC / 220 VAC
Feeding Type	Continuous	Single Shot on demand	Single Shot or Batch Count	Single Shot or Batch Count
Warranty	2 Year Limited	2 Year Limited	2 Year Limited	2 Year Limited

If you need any additional sales resource listed above please contact us at: sales@sure-feed.com
Please specify DVD or CD when talking with your sales representative.

Please send in samples to our Sales Department for testing. All products are application dependent.

Applications: Ink Jet, Labeling, Packaging, Inserting, Wrapping, Scanning, Laminating, Stamping, Etc.

Standard Features: Input To Output Side Guides, Formulated Belts, 1/4" Powder Coated Feeder Body, Interface, "The Shaker" (except 600 Series)

Optional Features: Stainless Steel, Double Detect, Stand, Light Tower



SE 600 PC/SP
(Model shown.
ECO models available)

- ▶ Variable Speed
- ▶ Easy Setup
- ▶ Input To Output Guides
- ▶ Integration Capability
- ▶ Patented Dynamic Rotation Technology (SE Models)
- ▶ Batch Counting

TYPE OF UNIT: SMALL PRODUCT FEEDER

For feeding products smaller than 3" wide.

KEY FEATURES

- Feedable Materials**
- Credit Cards
 - Business Cards
 - Post Cards
 - Hang Tag
 - Folded Pieces
 - Signatures
 - Narrow Product
 - & More

FOOTBALL SEPARATOR - ECO

Sure-Feed's patented stationary style separator is available in the ECO models only. The football shaped separator simulates a large diameter creating the most accurate separation for a stationary separator in the industry.

DYNAMIC ROTATION SEPARATOR - SE

This feature comes standard in our top of the line feeders. The Gold Separator Wheel counter rotates against the flow of material which gives the separator o-rings even wear and no "flat spots". The large diameter makes for a perfect pre-shingle prior to the nip point. (Not shown)

REDUCED GLAZING FORMULA BELTS


This eliminates the slip feeding issues created by large product, over weight feed stacks, slick or coated stock.

HEAVY-DUTY FEEDER BODY CONSTRUCTION

1/4" powdercoated feeder body construction ensures strength and durability.

PRODUCT GUIDES

Keeps pieces uniform and square from input to output.

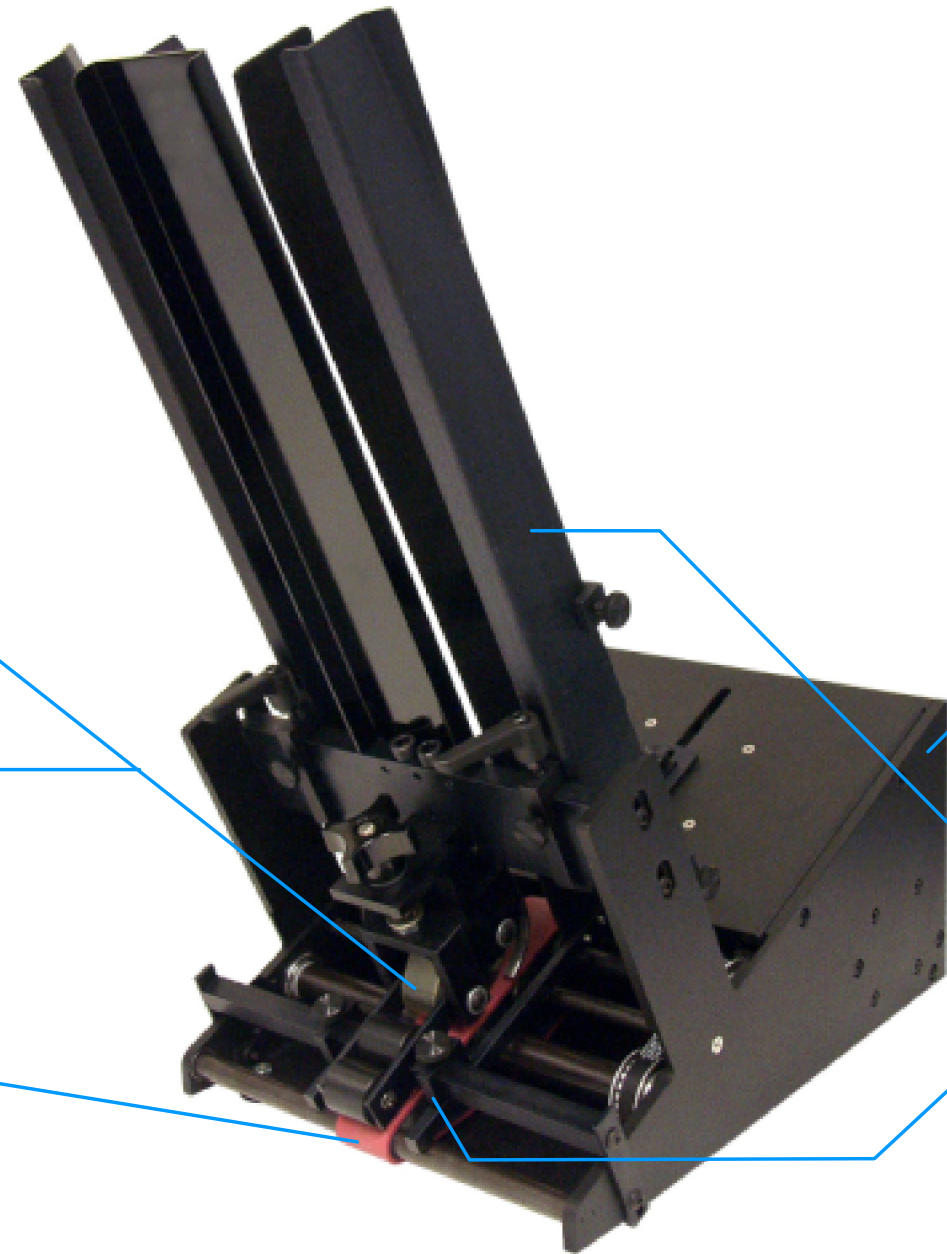

Technical Information



Variable speed feeding of small product. Feeding product for verification, batch counting, ink jet printing, or any other continuous feed applications.



By using a single separator the SP feeder can feed narrow product.



The SP (Small Product) Vacuum Conveyor is ideal for transferring "small products" for labeling or similar applications. The pieces are collected on a 3' Slow Moving Conveyor. The SP Conveyor is equipped with a Positive Flow Transfer Device to ensure a perfect shingle.



The SP feeder interfaced on the SP conveyor for a labeling application.



SP Feeder shown with Dynamic Rotation Technology.

OTHER PRODUCTS FOR SMALL PRODUCTS

- SP Vacuum Conveyor**
- 3' Slow Moving Collection Extension
 - Designed for small product
 - Variable Speed
 - 110 VAC Outlet for feeder
 - 6' or 9' L x 16" W

- SP Vacuum Base**
- 73" Long x 24" W
 - Feeder & conveyor synchronization
 - In / Off Line Abilities
 - Industry's Best Printing Platform

- VPS**
- Adjustable Height Stand
 - Jog Plate
 - Leveling Feet & Casters

- ECO / SE 900 SP**
- Continuous Feed
 - Feed down to 1" wide product
 - Interface available

- SE 600 PS/SP**
- Single Shot on demand
 - Interface available
 - Dynamic Rotation Technology
 - Used for inserting, packaging, wrapping, etc.

- ECO / SE 600 PC/SP**
- Single Shot or Batch Count on demand
 - Interface available
 - Used for inserting, packaging, wrapping, etc.